

XC RACING PRESCOTT



FEATURES

11 Speed

MSD Carbon Frame

Fox Float Fork

27.5+ Compatible

NEW OR CHANGED FOR 2018

Fox Float Fork

X-Fusion rear shock

SLX Shifter & Rear derailleur


Shimano MT500 Hydraulic Disc brakes

BIKE SPECS

Frame	New 29" Full MSD Carbon, 100mm Travel, 1-1/8~ 1.5 Taper, 12x148 Boost, PF92, 27.5 Plus Compatible
Rear Shock	X-Fusion Q2 Pro RL Ext Rebound, Lockout
Fork	FOX Float 32, 29 Std/27.5+ Evol Air, Rhythm, 100mm, Grip 3-Pos Micro Adj., Ext Rebound Adj., 1-1/8~1.5 Taper, 15mm X 110 QR Boost
Headset	FSA Orbit C-40-CF-ACB, N.42/CF/ACB, 1-1/8"~1.5" Integrated
Rims	WTB STP-i23 TCS, Disc, Double Wall, 29x28H, Tubeless Ready
Hub, Front	Formula TD711 S/B Disc, 15X110mm Axle, Straight Pull, Boost
Hub, Rear	Formula TD-148S S/B Disc Cassette, 12 x 148mm, Straight Pull, Boost
Tires	Maxxis Ikon TR 3C Maxx Speed, 120TPI Folding, Triple Compound, Tubeless Ready, 29X2.2
Spokes	14/15g Black Stainless, w/Alloy Nipples 28x28
Derailleur, Rear	Shimano SLX RD-M7000
Shifters	Shimano SLX, SL-M7000, 11s, Trigger, Right Only, I-Spec II
Chain	KMC X11EL-1 w/Missing Link
Crankset	Samox 2pc Forged, PF92, Narrow Wide 32T, Boost, S:170, M-L 175
BB	PF92
Freewheel / Cassette	Sun Race, 11-46T, 11-speed
Seatpost	Q2 Carbon, 31.6X350mm
Saddle	WTB Volt Comp
Handlebar	Kore XCD-Flat Top, 31.8 x 720mm
Stem	Kore XCD, Alloy 3D Forged, Threadless 4-bolt, 31.8, S: 70mm, M-L: 80mm
Grips	Q2 Lock-on
Brake Levers	Shimano MT500, Servo Wave w/ I-Spec II
Brakes	Shimano MT500, Hydraulic Disc, Servo Wave, 180/160mm Wave 12 Rotors
Color	Matte Black
Frame Size	S, M, L

PART # MODEL SIZE COLOR

98-169-000	Prescott	S/15.5	Matte Black
98-169-001	Prescott	M/17.5	Matte Black
98-169-002	Prescott	L/19	Matte Black

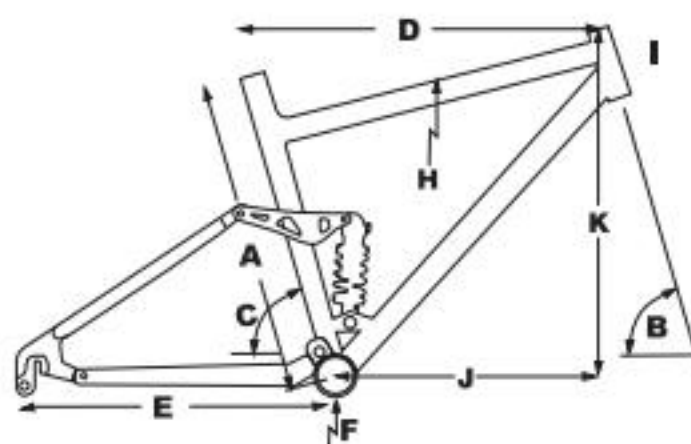

GEOMETRY

SIZE	A s/t c-t	B h/t	C s/t	D t/t effectv	E c/s	F BB Height	G s.o.	H h/t L	I Stack	J Reach
S/15.5	400 / 15.7	68°	73.8°	570 / 22.4	438 / 17.2	328 / 12.9	0 / 0	100 / 3.9	586 / 23.1	400 / 15.7
M/17.5	445 / 17.5	68°	73.8°	600 / 23.6	438 / 17.2	328 / 12.9	0 / 0	105 / 4.1	590 / 23.2	429 / 16.9
L/19	483 / 19	68°	73.8°	620 / 24.4	438 / 17.2	328 / 12.9	0 / 0	120 / 4.7	604 / 23.8	445 / 17.5

