

TRAIL 650B

SIXFIFTY 3500



FEATURES

11 Speed

6061 Alloy Frame

SLX 1x11 rear derailleur & shifter

Tubeless ready


NEW OR CHANGED FOR 2018

RST First Air Fork
WTB STP-i23 Rims
SLX Shifter & Rear derailleur
1x Alloy Cranks
Sun Race 11-46 cassette
Shimano M396 Hydraulic Disc Brakes

BIKE SPECS

Frame	650B 120mm, Alloy 6061 w/Custom Formed Dbl.Butt'd TT & DT, 1.5 Taper, 12 x 142 Rear Axle , w/Replaceable Derailleur Hanger
Rear Shock	X-Fusion 02 Pro RL, Air, Ext Rebound, Lockout
Fork	RST First 27.5 Air, 120mm, Alloy Steerer, Magnesium Lowers, Hydraulic Damp, External rebound, Lockout, 1.5 Taper, 15Q
Headset	FSA Orbit 1.5E, Zero Stack, 1 1/8"~1.5
Rims	WTB STP-i23 TCS, Disc, Double Wall, 28H, Tubeless Ready
Hub, Front	Light Weight S/B Alloy Disc, 15mm, Straight Pull
Hub, Rear	Light Weight S/B Alloy Disc, Cassette, 12 x 142mm, Straight Pull
Tires	Maxxis Ardent 27.5 x 2.25, 60 TPI Folding, Tubeless Ready
Spokes	14G Black w/Alloy Nipples, 28X28
Derailleur, Rear	Shimano SLX RD-M7000
Shifters	Shimano SLX, SL-M7000, 11s, Trigger, Right Only
Chain	KMC X11-1 w/Missing Link
Crankset	Samox 2pc Forged w/Outboard Bearing, Narrow Wide 32T C/R
BB	Outboard Cartridge Bearing
Freewheel / Cassette	Sun Race 11-46T, 11-speed
Seatpost	Alloy micro-adjust, 30.9X350mm
Saddle	WTB Volt Sport
Handlebar	Kore XCD 1 Riser, 760 x 18mm, 31.8
Stem	Kore XCD, Alloy 3D Forged, Threadless 4-bolt, 31.8
Grips	Q2 Lock-on
Brake Levers	Shimano M396
Brakes	Shimano M396 Hydraulic Disc, 160/160mm Rotors Wave 12
Color	Matte Gray
Frame Size	S, M, L, XL

PART #	MODEL	SIZE	COLOR
98-156-000	SixFifty 3500	S/15.5	Matte Gray
98-156-001	SixFifty 3500	M/17	Matte Gray
98-156-002	SixFifty 3500	L/19	Matte Gray
98-156-003	SixFifty 3500	XL/20.5	Matte Gray

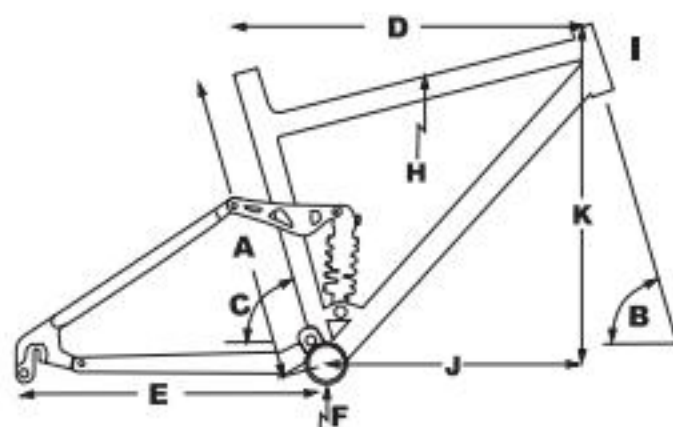

GEOMETRY

SIZE	A s/t c-t	B h/t"	C s/t"	D t/t effectv	E c/s	F BB Height	H s.o.	I h/t L	K Stack	J Reach
S/15.5	394 / 15.5	68.5°	73°	554 / 21.8	430 / 16.9	330 / 13	725 / 28.5	110 / 4.3	587 / 23.1	390 / 15.4
M/17	432 / 17	68.5°	73°	580 / 22.8	430 / 16.9	330 / 13	741 / 29.2	120 / 4.7	597 / 23.5	413 / 16.3
L/19	483 / 19	68.5°	73°	607 / 23.9	430 / 16.9	330 / 13	773 / 30.4	130 / 5.1	606 / 23.9	435 / 17.1
XL/20.5	521 / 20.5	68.5°	73°	633 / 24.9	430 / 16.9	330 / 13	789 / 31.1	140 / 5.5	615 / 24.2	457 / 18

