

XC SPORT 650B

SIXFIFTY 600+



FEATURES

11 Speed

6061 Alloy Frame

SLX 1x11 rear derailleur & shifter

Boost


NEW OR CHANGED FOR 2018

WTB Scraper i35 Rims
SLX Shifter & Rear derailleur
1x Alloy Cranks
Sun Race 11-46 cassette
Shimano M396 Hydraulic Disc Brakes

BIKE SPECS

Frame	650B Plus, Alloy 6061 Double Butted Custom Formed TT & DT w/Replaceable Derailleur Hanger, 1.5 Taper, Frame Will Accept 29X2.1, Boost
Fork	SR Raidon 32-LOR, 27.5 Plus, 100mm Air, Hydraulic Speed Lock-Out w/Ext. Rebound Damping Adj, 1-1/8~ 1.5 Alloy Taper, 15Q x 110 Boost
Headset	FSA Orbit 1.5E, Zero Stack, 1 1/8"~1.5
Rims	WTB Scraper i35 TCS Alloy Plus Disc, 27.5, Double Wall, 32H, Tubeless Ready
Hub, Front	Formula DC-511 Alloy Disc w/CNC Rotor Flange, 15mm x 110mm, Boost
Hub, Rear	Formula DC2241, Alloy Disc w/CNC Rotor Flange, QR, Cassette, Boost, 10 x 141mm
Tires	Maxxis Rekon Plus, 27.5 x 2.8, 60 TPI, EXO/TR, Foldable, Tubeless Ready
Spokes	14G Stainless Black w/Alloy Nipples, 32X32
Derailleur, Rear	Shimano SLX RD-M7000
Shifters	Shimano SLX, SL-M7000, 11s, Trigger, Right Only
Chain	KMC X11EL-1 w/Missing Link
Crankset	Samox 2pc Forged w/Outboard Bearing, Narrow Wide 30T C/R, Boost, XS-S: 170, M-L: 175, Ladies: 170
BB	Outboard Cartridge Bearing
Freewheel / Cassette	Sunrace 11-46T, 11-speed
Seatpost	KHS Alloy Micro-adjust, 31.6X350mm
Saddle	WTB Volt Sport, Ladies: KHS Ladies Design
Handlebar	Alloy Riser, 31.8, Butted 720X12mm, Ladies: 680x12mm
Stem	Alloy 3D Forged, 4-bolt, 6 degree, 31.8, XS-S: 60, M: 70mm, L: 80mm, Ladies: 60mm
Grips	Q2 Lock-on
Brake Levers	Shimano M396
Brakes	Shimano M396 Hydraulic Disc, 180/160mm Rotors Wave 12
Color	Matte Dark Gray, Ladies: White
Frame Size	S, M, L, XL, Ladies: S

PART #	MODEL	SIZE	COLOR
98-154-001	SixFifty 600+	S/15	Matte Dark Gray
98-154-002	SixFifty 600+	M/17	Matte Dark Gray
98-154-003	SixFifty 600+	L/19	Matte Dark Gray
98-154-004	SixFifty 600+	XL/21	Matte Dark Gray
98-154-005	SixFifty 600+ Ladies	S/15	White

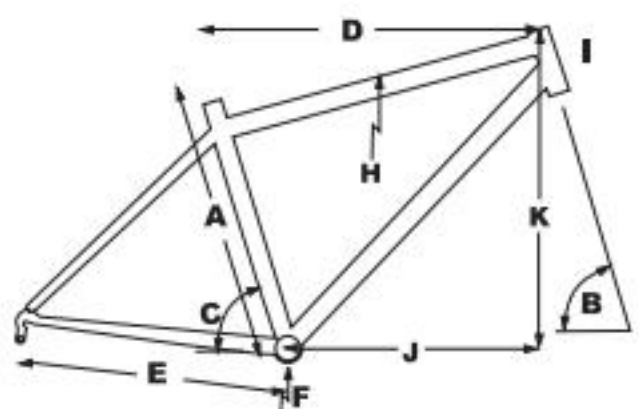

GEOMETRY

SIZE	A s/t c-t	B h/t*	C s/t*	D t/t effectv	E c/s	F BB Height	H s.o.	I h/t L	K Slack	J Reach
S/15	381 / 15	67.5°	73°	591 / 23.3	430 / 16.9	307 / 12.1	701 / 27.6	90 / 3.5	608 / 23.9	405 / 16
M/17	432 / 17	67.5°	73°	612 / 24.1	430 / 16.9	307 / 12.1	731 / 28.8	100 / 3.9	617 / 24.3	423 / 16.6
L/19	483 / 19	67.5°	73°	635 / 25	430 / 16.9	307 / 12.1	763 / 30	115 / 4.5	631 / 24.8	442 / 17.4
XL/21	533 / 21	67.5°	73°	659 / 25.9	430 / 16.9	307 / 12.1	795 / 31.3	130 / 5.1	645 / 25.4	462 / 18.2

