

TRAIL 650B

SIXFIFTY 6600+

New Model



FEATURES

11 Speed
MSD Carbon Frame
Fox Float 36 Fork
XT/SLX 1x11 Drivetrain w/ FSA Gamma Pro Crank


NEW MODEL FOR 2018

Fox Float Fork & Rear shock
WTB Scraper i35 Rims
Formula Hubs
Maxxis Rekon Plus Tires
XT Rear derailleur
SLX Shifter
FSA Gamma Pro Cranks
Shimano MT500 Hydraulic Disc Brakes

BIKE SPECS

Frame	MLS Full Carbon, 650B, 150mm, 1.5 Taper, 12 x 148 Boost Rear Axle, w/Replaceable Derailleur Hanger,
Rear Shock	FOX Float DPS, Performance, 3-Pos, Evol w/LV Eyelet
Fork	FOX Float 36, 29 Std/27.5+ Evol Air, Performance, 160mm, Grip 3-Pos Micro Adj., Ext Rebound Adj., 1-1/8~1.5 Taper, 15mm X 110 QR Boost
Headset	FSA Orbit 1.5E, Zero Stack, 1 1/8"~1.5
Rims	WTB Scraper i35 TCS Alloy Plus Disc, 27.5, Double Wall, 28H, Tubeless Ready
Hub, Front	Formula TD711 S/B Disc, 15X110mm Axle, Straight Pull, Boost
Hub, Rear	Formula TD-148S S/B Disc Cassette, 12 x 148mm, Straight Pull, Boost
Tires	Maxxis Rekon Plus 27.5 x 2.8, 120tpi, Folding, 3C/EXO/TR, Tubeless Ready
Spokes	14/15G Double Butted Stainless, Black w/Alloy Nipples, 28X28
Derailleur, Rear	Shimano XT RD-M8000
Shifters	Shimano SLX, SL-M7000, 11s, Trigger, Right Only, I-Spec II
Chain	KMC X11EL-1 w/Missing Link
Crankset	FSA Gamma Pro , 2 pc., 30T Megatooth, Boost , PF92, S: 170, M-XL: 175
BB	FSA PF92
Freewheel / Cassette	Sun Race 11-46T, 11-speed
Seatpost	Kind Shock E30i, Integra w/Remote, Travel Adj
Saddle	WTB High Tail, CrMo Rail
Handlebar	Kore Durox 35mm, 780mm X 20mm
Stem	Kore Cubix M35, Alloy 3D Forged, Threadless 4-bolt, S-L: 60mm, XL: 70mm
Grips	Q2 Lock-On
Brake Levers	Shimano MT500, Servo Wave w/ I-Spec II
Brakes	Shimano MT500, Hydraulic Disc, Servo Wave, 180/160mm Wave 12 Rotors
Color	Bright Blue
Frame Size	S, M, L, XL

PART #	MODEL	SIZE	COLOR
98-158-000	SixFifty 6600+	S/15.5	Bright Blue
98-158-001	SixFifty 6600+	M/17.5	Bright Blue
98-158-002	SixFifty 6600+	L/19	Bright Blue
98-158-003	SixFifty 6600+	XL/21	Bright Blue

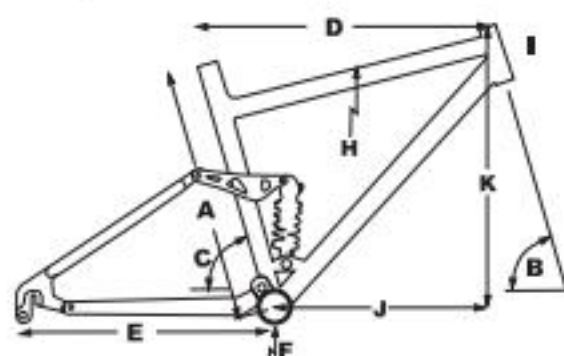

GEOMETRY

SIZE	A s/t c-t	B h/t*	C s/t*	D t/t effectv	E c/s	F BB Height	H s.o.	I h/t L	K Slack	J Reach
S/15.5	400 / 15.7	66.5°	74°	580 / 22.8	457 / 18	345 / 13.6	0 / 0	100 / 3.9	610 / 24	405 / 15.9
M/17.5	445 / 17.5	66.5°	74°	600 / 23.6	457 / 18	345 / 13.6	0 / 0	110 / 4.3	619 / 24.4	423 / 16.7
L/19	480 / 18.9	66.5°	74°	620 / 24.4	457 / 18	345 / 13.6	0 / 0	120 / 4.7	628 / 24.7	440 / 17.3
XL/21	530 / 20.9	66.5°	74°	640 / 25.2	457 / 18	345 / 13.6	0 / 0	130 / 5.1	638 / 25.1	457 / 18

KHS