

XC SPORT TEMPE



FEATURES

11 Speed
6061 Alloy Frame
SLX 1x11 Rear Derailleur & shifter
27.5+ Compatible

NEW OR CHANGED FOR 2018


SR Raidon Fork
WTB STP-i23 Rims
Maxxis Ikon tires
SLX shifter & Rear derailleur
Shimano M396 Hydraulic Disc brakes

BIKE SPECS

Frame	Alloy 6061 Dbl Butted w/Custom Formed TT & DT, 1.5 Taper, 141mm Boost, w/Replaceable Derailleur Hanger, 27.5 Plus Compatible
Fork	SR Raidon 32-LOR, 29 Std/27.5 Plus, 100mm Air, Hydraulic Speed Lock-Out w/Ext. Rebound Damping Adj, 1-1/8~ 1.5 Alloy Taper, 15Q x 110 Boost
Headset	FSA Orbit 1.5E, Zero Stack, 1 1/8"~1.5
Rims	WTB STP-i23 TCS, Disc, Double Wall, 29x32H, Tubeless Ready
Hub, Front	Formula DC-511 Alloy Disc w/CNC Rotor Flange, 15mm x 110mm, Boost
Hub, Rear	Formula DC2241, Alloy Disc w/CNC Rotor Flange, QR, Cassette, Boost
Tires	Maxxis Ikon EXO/TR, 60TPI Folding, Tubeless Ready, 29X2.2
Spokes	14G Stainless Black w/Alloy Nipples, 32X32
Derailleur, Rear	Shimano SLX RD-M7000
Shifters	Shimano SLX, SL-M7000, 11s, Trigger, Right Only
Chain	KMC X11EL-1 w/Missing link
Crankset	Samox 2pc Forged w/Outboard Bearing, Narrow Wide 30T C/R, Boost, S: 170, M-XL: 175
BB	Outboard Cartridge Bearing
Freewheel / Cassette	Sun Race, 11-46T, 11-speed
Seatpost	KHS Alloy Micro-adjust, 31.6X350mm
Saddle	WTB Volt Sport
Handlebar	Alloy Butted Low Riser, 31.8, 720X12mm
Stem	Alloy 3D Forged, 4-bolt, 6 Degree, 31.8, S: 60mm, M: 70mm, L: 80mm, XL: 90mm
Grips	Q2 Lock-on
Brake Levers	Shimano M396
Brakes	Shimano M396 Hydraulic Disc, 180/160mm Rotors Wave 12
Color	Matte Steel Blue
Frame Size	S, M, L, XL

PART # MODEL SIZE COLOR

98-165-000	Tempe	S/15	Matte Steel Blue
98-165-001	Tempe	M/17	Matte Steel Blue
98-165-002	Tempe	L/19	Matte Steel Blue
98-165-003	Tempe	XL/21	Matte Steel Blue

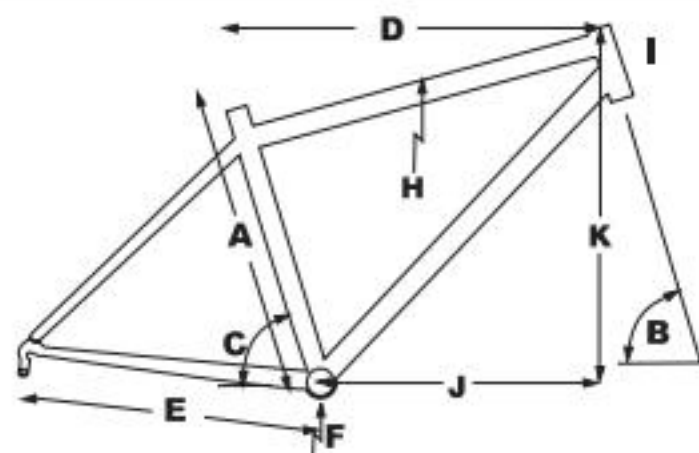

GEOMETRY

SIZE	A s/t c-t	B h/A°	C s/t°	D t/t effectv	E c/s	F BB Height	H s.o.	I h/t L	K Stack	J Reach
S/15	381 / 15	67.5°	73°	591 / 23.3	430 / 16.9	307 / 12.1	701 / 27.6	90 / 3.5	608 / 23.9	405 / 16
M/17	432 / 17	67.5°	73°	612 / 24.1	430 / 16.9	307 / 12.1	731 / 28.8	100 / 3.9	617 / 24.3	423 / 16.6
L/19	483 / 19	67.5°	73°	635 / 25	430 / 16.9	307 / 12.1	763 / 30	115 / 4.5	631 / 24.8	442 / 17.4
XL/21	533 / 21	67.5°	73°	659 / 25.9	430 / 16.9	307 / 12.1	795 / 31.3	130 / 5.1	645 / 25.4	462 / 18.2

